



# AMERICAN INGENUITY

## ▲ 34 DOME ELEVATIONS ▲

1ST FLOOR AREA:  
2ND FLOOR AREA:  
(TO 5' HEADROOM)

851 sq ft  
427 sq ft

FIRST FLOOR CEILING HEIGHT  
MUST BE 7'-6" TO UTILIZE  
A DOOR DORMER ON THE  
SECOND FLOOR

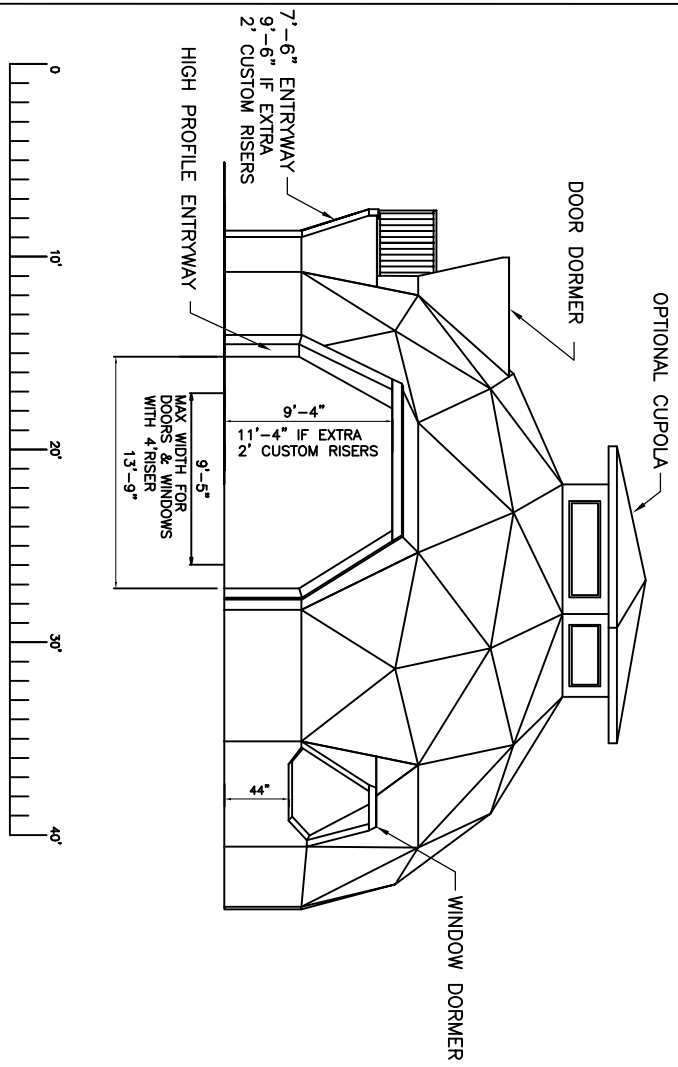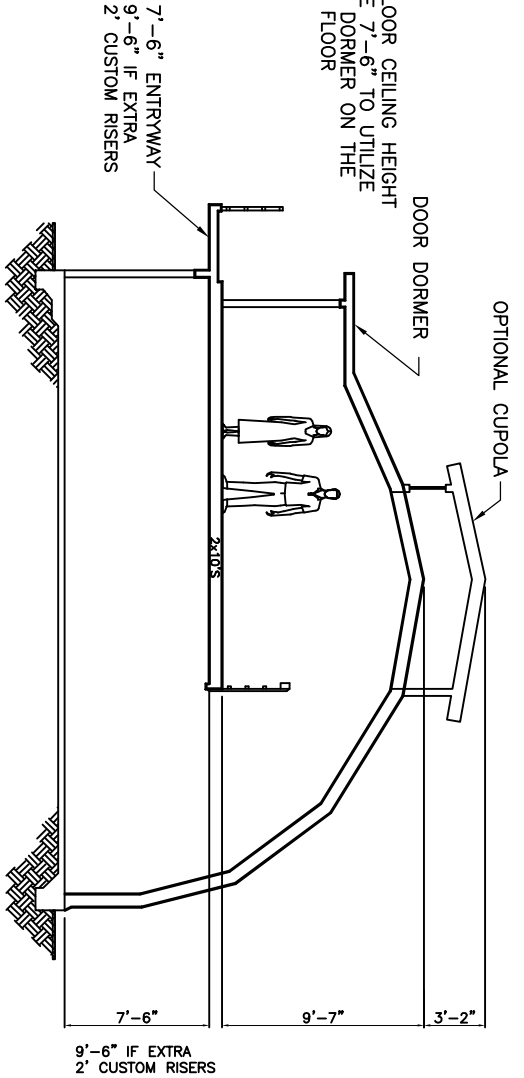

THE FOLLOWING PERTAINS TO FIRST FLOOR AREAS WHEN SECOND FLOOR INSTALLED ABOVE. EACH DOME OWNER DETERMINES HOW MUCH OF THE SECOND FLOOR IS INSTALLED. WHERE NO SECOND FLOOR IS INSTALLED THERE WILL BE HIGH VAULTED CEILINGS.

THREE FREQUENCY DOMES 30', 34', 36', 40', 45' & 48' CAN HAVE ADDITIONAL CUSTOM TWO FOOT RISER PANELS INSTALLED ABOVE STANDARD 4' RISER PANELS. THIS RESULTS IN FIRST FLOOR CEILING HEIGHT OF 9'-6" IN 34' & 36" IF SECOND FLOOR DOOR DORMER INSTALLED. IF NO SECOND FLOOR DOOR DORMER THEN 10' FIRST FLOOR CEILING HEIGHT. INSTALLING ADDITIONAL 2' RISERS RESULTS IN MANUFACTURING CUSTOM ENTRYWAY & FIRST FLOOR DOOR DORMER BASE PANELS.

