

▲ 36° DOME FLOOR PLANNER ▲


FIRST FLOOR MAX: 948 sq.ft.
 SECOND FLOOR MAX:* 470 sq.ft.
 (TO 5' HEADROOM)
 TOTAL MAX: 1,418 sq.ft.

* NO HIGH VAULTED CEILING,
 STAIRS WITH TWO STEP PLATFORM,
 FIVE SECOND FLOOR DORMERS,
 EACH DORMER ADDING 9 SQ.FT

EACH OPENING INDICATES A
 POSSIBLE LOCATION FOR A 2ND
 FLOOR WINDOW OR DOOR DORMER
 W/ A 2'x6'-8" DOOR.

TO MEET CODE REQUIRED
 FIRE EGRESS SIZE
 BEDROOM WINDOW,
 INSTALL DOOR DORMER ON
 2ND FLOOR ABOVE FIRST
 FLOOR STANDARD
 ENTRYWAY. INSTEAD OF
 INSTALLING A DOOR,
 INSTALL FIRE EGRESS
 WINDOW.


FIRE EGRESS ROUGH
 OPENING IS 29"x42" OR
 42"x29" ORDER CASEMENT
 WINDOW WITH EGRESS
 HARDWARE.

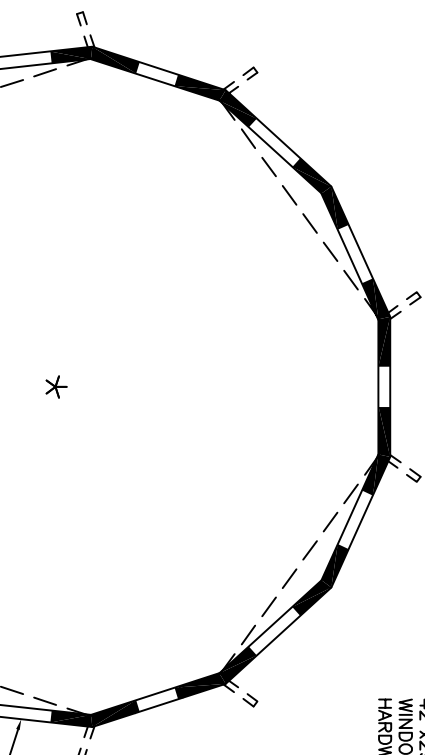

EACH OPENING INDICATES A
 POSSIBLE LOCATION FOR A
 1ST FLOOR WINDOW OR DOOR
 DORMER.
 DORMER CAN'T BE
 INSTALLED IN BOTH
 LOCATIONS. SELECT ONE.
 THE DASHED LINES INDICATE
 THE POSSIBLE LOCATION OF
 ADDITIONAL ENTRYWAYS.

FIRST FLOOR PLAN

ENTRYWAYS MAY CONTAIN
 BOTH DOORS AND WINDOWS.

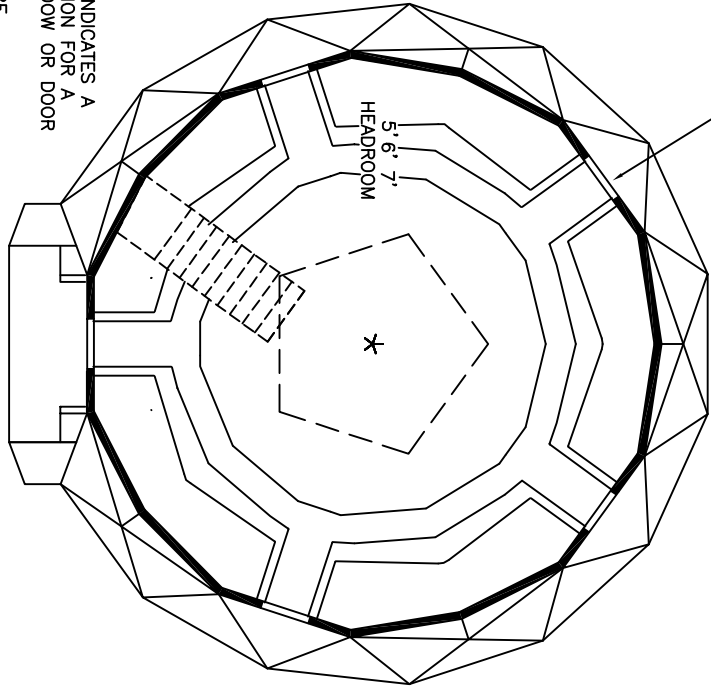

SECOND FLOOR PLAN
 THE CENTER PENTAGON INDICATES
 THE OUTLINE FOR A CUPOLA.

2ND FLOOR DOOR DORMERS CAN ONLY BE
 LOCATED OVER A 7'-6" ENTRYWAY TO
 CREATE A BALCONY. OR INSTALL WINDOW
 INSTEAD OF DOOR FOR FIRE EGRESS.
 A SECOND FLOOR DORMER CAN ONLY BE
 INSTALLED WHEN THERE IS A FIRST FLOOR
 STANDARD ENTRYWAY DIRECTLY BELOW IT.

